

Bailey 2299

Panel
Acoustic



Paris Frost
7020



Belmont Silver
7010



Baxter Beige
7011



Allagash Mist
7040



Platinum
7013



Sherman Pewter
7024



Kennebec Blue
7041



Khaki
7012



Cave
7047

Bailey 2299

Panel
Acoustic

Specifications

Content

100% recycled polyester

Weight

8.3 ± 0.5 oz./lin. yd.

Width

66" min. useable

Repeat

none

Treatment

polyester binder

Cleaning Code

W-S

Performance



Colorfastness to Light (AATCC 16 Option 3)
Grade 4 min. at 40 hours



Colorfastness to Crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet




Breaking Strength (ASTM D5034)
150 lbf min. warp and 100 lbf min. fill



Flammability (ASTM E84)
Class I or A

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

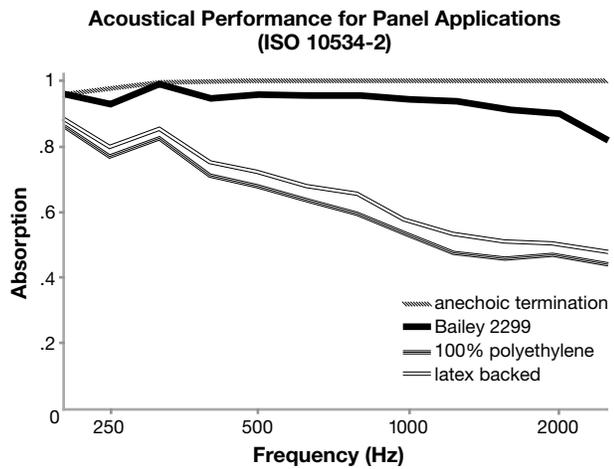

NRC of anechoic termination

1.00

NRC of fabric in front of anechoic termination

.95

Miscellaneous

Proudly woven in the USA supporting our local communities. Colors may vary slightly between dye lots. This is a directional fabric. Application testing of this product is recommended.

Visit SoundAway.com or call to request samples.



Terratex is a registered trademark of True Textiles, Inc. and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



CO₂ emissions from 100% of the electricity used by the manufacturer to produce this product have been measured and offset in accordance with The CarbonNeutral Protocol.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

*ACT® registered certification marks.

Sound  Away
.com

760.599.3985 Sales@SoundAway.com

 Guilford of Maine®