

Mingle 2527

Panel
Acoustic



Straw
030



Biscuit
090



Green Tea
040



Winter
070




Crystal
060



Putty
080



Khaki
020



Carbon
010

Mingle 2527

Panel
Acoustic

Specifications

Content

23% post-consumer recycled polyester
77% pre-consumer recycled polyester

Weight

10.9 ± 1.0 oz./lin. yd.

Width

66" min. useable

Repeat

16.7" vertical, 16.2" horizontal

Cleaning Code

W-S

Performance



Colorfastness to Light (AATCC 16 Option 3)
Grade 4 min. at 40 hours



Colorfastness to Crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet




Breaking Strength (ASTM D5034)
250 lbf min. warp and 100 lbf min. fill



Flammability (ASTM E84)
Class I or A

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

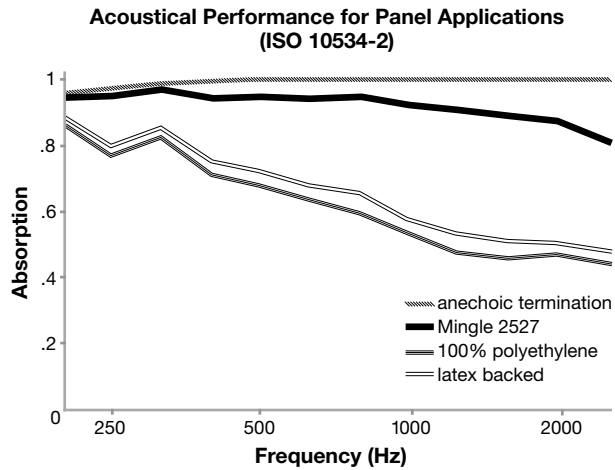

NRC of anechoic termination

1.00

NRC of fabric in front of anechoic termination

.90

Miscellaneous

Proudly woven in the USA supporting our local communities.
Colors may vary slightly between dye lots.
This is a directional fabric.
Application testing of this product is recommended.

Visit SoundAway.com or call to request samples.



Terratex is a registered trademark of True Textiles, Inc. and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



CO₂ emissions from 100% of the electricity used by the manufacturer to produce this product have been measured and offset in accordance with The CarbonNeutral Protocol.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

*ACT® registered certification marks.

Sound  Away
.com

760.599.3985 Sales@SoundAway.com

 Guilford of Maine®