Phone Tag 2314

Panel
Acoustic

Wheat
060

Almond
070

Clover
011

Sky Dive
050

Sound Away .com
760.599.3985 Sales@SoundAway.com

Phone Tag 2314

Panel
Acoustic

Specifications

Content
79% post-consumer recycled polyester
21% pre-consumer recycled polyester

Weight
14.0 ± 1.0 oz./lin. yd.

Width
66" min. useable

Repeat
none

Cleaning Code

W-S

Performance

Colorfastness to Light (AATCC 16 Option 3)
Grade 4 min. at 40 hours

Colorfastness to Crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet

Breaking Strength (ASTM D5034)
150 lbf min. warp and 110 lbf min. fill

* **Flammability (ASTM E84)**
Class I or A

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

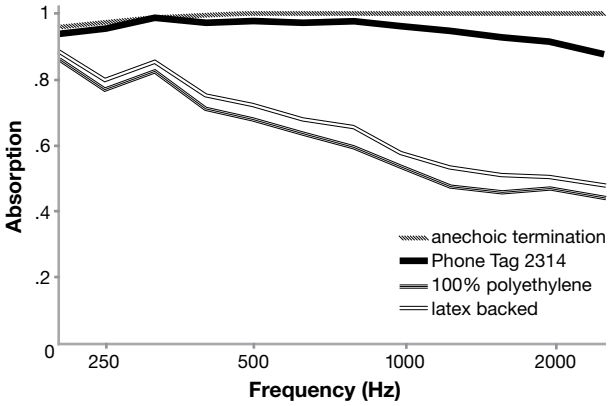

NRC of anechoic termination
1.00

NRC of fabric in front of anechoic termination
.95

Miscellaneous

Proudly woven in the USA supporting our local communities.
Colors may vary slightly between dye lots.
This is a directional fabric.
Application testing of this product is recommended.

Visit SoundAway.com or call to request samples.

Terratex is a registered trademark of True Textiles, Inc. and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.

CO_2 emissions from 100% of the electricity used by the manufacturer to produce this product have been measured and offset in accordance with The CarbonNeutral Protocol.

This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

*ACT® registered certification marks.

SoundAway.com
760.599.3985 Sales@SoundAway.com

Guilford of Maine®