

# Studio 54 2966

Acoustic



**Disco**  
7030



**Shimmer**  
7041



**Glam**  
7040



**Hustle**  
7032



**Glitter**  
7031



**Jagger**  
7011



**Warhol**  
7042



**Ross**  
7044



**Stayin' Alive**  
7010



**Inferno**  
7012



**Flashy**  
7043



**Summer**  
7021



**Gloria**  
7020

# Studio 54 2966

Acoustic

## Specifications

**Content**  
100% polypropylene

**Weight**  
12.8 ± 1.0 oz./lin. yd.

**Width**  
66" min. useable


**Repeat**  
.1" vertical, none horizontal


**Treatment**  
polyester binder


## Cleaning Code


W-S. May be cleaned with a 4:1 water-to-bleach solution. Rinse well after cleaning.

## Performance

 **Colorfastness to Light (AATCC 16 Option 3)**  
Grade 4 min. at 40 hours


 **Colorfastness to Crocking (AATCC 8)**  
Grade 4 min. dry & Grade 3 min. wet

 **Breaking Strength (ASTM D5034)**  
100 lbf min. warp and 250 lbf min. fill

 **\* Flammability (ASTM E84)**  
Class I or A

## Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

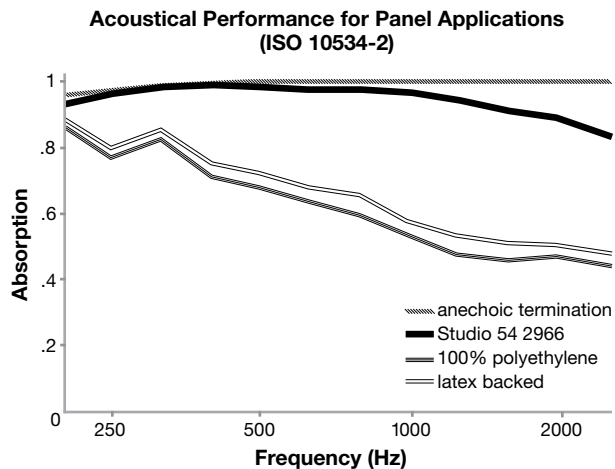

**NRC of anechoic termination**  
1.00

**NRC of fabric in front of anechoic termination**  
.95

## Miscellaneous

Colors may vary slightly between dye lots.

This is a directional fabric.

Application testing of this product is recommended.

Variation in texture and luster, due to the manufacturing process, is to be expected and is part of the inherent beauty of Studio 54.

Visit [SoundAway.com](http://SoundAway.com) or call to request samples.

Sound  Away .com  
760.599.3985 Sales@SoundAway.com

 Guilford of Maine®

\*ACT® registered certification marks.