
FR701° 2100

Panel Acoustic



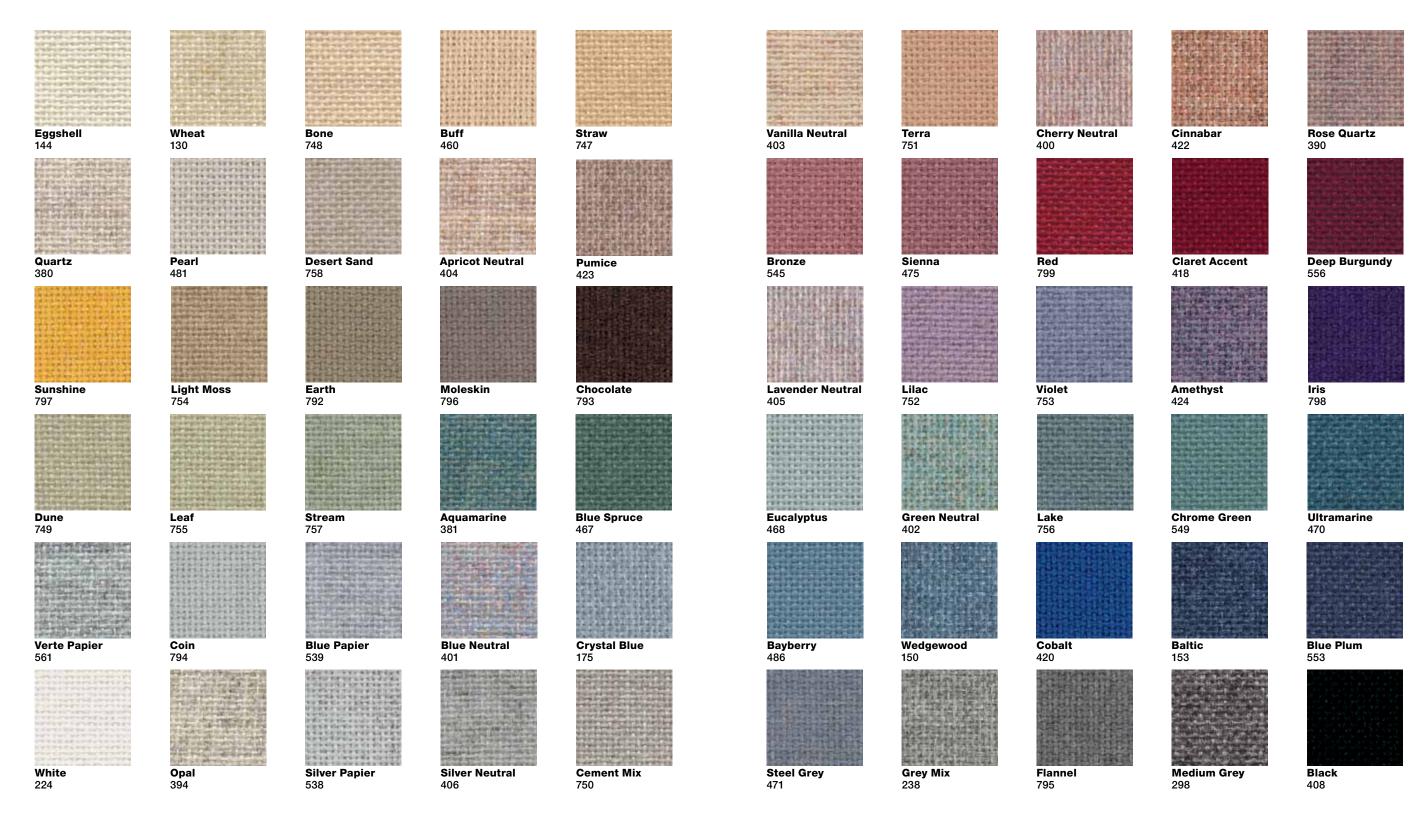

FR701° 2100

Panel Acoustic

Specifications

Content

100% post-consumer recycled polyester

Weight

 16.0 ± 0.5 oz./lin. yd.

Width

66" min. useable

Repeat

none

Cleaning Code

W-S

Performance



Colorfastness to Light (AATCC 16 Option 3)

Grade 4 min. at 40 hours



Colorfastness to Crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet




Breaking Strength (ASTM D5034) 150 lbf min. warp and fill

* Flammability (ASTM E84) Class I or A

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

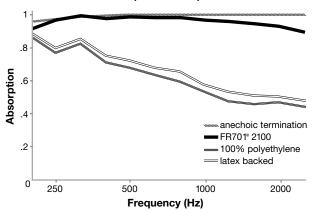

NRC of anechoic termination

NRC of fabric in front of anechoic termination

Miscellaneous

Proudly woven in the USA supporting our local communities. Colors may vary slightly between dye lots. This is a non-directional fabric.

Application testing of this product is recommended.

Visit SoundAway.com or call to request samples.



fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



 ${\rm CO_2}$ emissions from 100% of the electricity used by the manufacturer to produce this product have been measured and offset in accordance with The CarbonNeutral Protocol.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

*ACT® registered certification marks.



